

DO Isolated Barrier

NPEXB-C511


Single input, single output

NPEXB-C5D11

Double inputs, double outputs

Input: dry contact
Output: 35mA

Digital output isolated barrier. By switch signal controlling, transfers the dry contact signals from a safe area into current signals to a hazardous area, and drives field device like intrinsically safe valves, audible alarms, etc. It needs an independent power supply. The input, output, and power supply are galvanically isolated from each other.


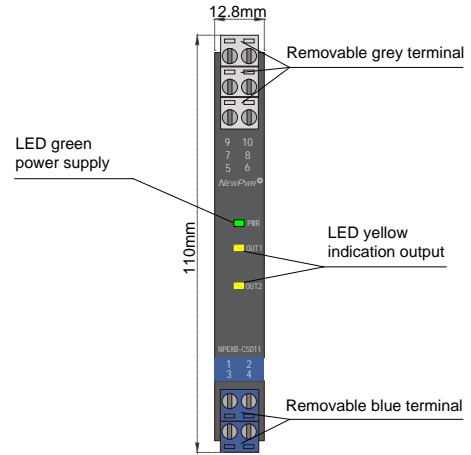


Parameters

- Power supply: 18V DC ~ 60V DC (Reverse power protection)
- Power dissipation: $\leq 1.2W$ (24V, single output)
 $\leq 2.4W$ (24V, double outputs)
- Input signal: dry contact
- Output voltage: $> 8.75V$ DC
- Open-circuit voltage: 21.5V DC
- Output current: $\leq 35mA$


Output equivalent circuit

Output characteristics diagram

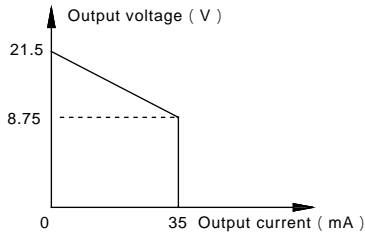

- Response time: $< 20ms$
- Electromagnetic compatibility: IEC 61326-3-1
- Dielectric strength: $\geq 3000V$ AC (intrinsically safe side / non-intrinsically safe side)
 $\geq 1500V$ AC (Power supply/non-intrinsically safe side)
- Insulation resistance: $\geq 100M\Omega$ (Input /Output/Power supply)
- Operation temperature: $-20^{\circ}C \sim +60^{\circ}C$
- Storage temperature: $-40^{\circ}C \sim +80^{\circ}C$
- Dimension: 12.8mm (W) \times 110mm (H) \times 117mm (D)

Wiring diagram

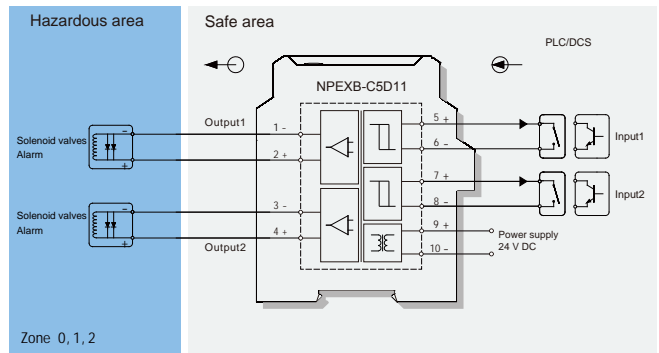

Explosive-proof parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)

Ex marking: [Ex ia Ga] IIC

Um: 250V

Certified parameters (Terminals 1, 2; 3, 4):

Uo=25.2V, Io=72mA, Po=454mW

II C: Co=0.107 μ F, Lo=6mH

II B: Co=0.82 μ F, Lo=18mH

II A: Co=2.9 μ F, Lo=48mH