

Frequency Isolated Safety Barrier

NPEXA-H61A1P1


Single input, double output

Input: Frequency
Output: 4 ~ 20 mA, relay


This isolated safety barrier converts the frequency signals from a hazardous area into current or voltage signals to a safe area by isolation, a relay alarm output. The input, output, and power supply are galvanically isolated from each other. A self-test feature is also available on this device. You can use PC or handheld programmer to modify parameters.

Technical data

Power supply:	18 V DC~32 V DC (Reverse power protection)																		
Power dissipation:	1.8 W (24V DC, double output)																		
Input signal:	<table border="0"> <tr> <td>Frequency</td> <td>Max. Input voltage: 30V</td> </tr> <tr> <td></td> <td>Min. Input amplitude: 2V</td> </tr> <tr> <td></td> <td>Frequency range: 0.1Hz~100kHz</td> </tr> <tr> <td>PNP/NPN</td> <td>Distribution voltage: 12V</td> </tr> <tr> <td></td> <td>Current: ≤ 20mA</td> </tr> <tr> <td></td> <td>Frequency range: 0.1Hz~10kHz</td> </tr> <tr> <td>NAMUR switch</td> <td>Distribution voltage: approx.8.2V</td> </tr> <tr> <td></td> <td>Short-circuit current: approx.8mA</td> </tr> <tr> <td></td> <td>Frequency range: 0.1Hz~10kHz</td> </tr> </table>	Frequency	Max. Input voltage: 30V		Min. Input amplitude: 2V		Frequency range: 0.1Hz~100kHz	PNP/NPN	Distribution voltage: 12V		Current: ≤ 20mA		Frequency range: 0.1Hz~10kHz	NAMUR switch	Distribution voltage: approx.8.2V		Short-circuit current: approx.8mA		Frequency range: 0.1Hz~10kHz
Frequency	Max. Input voltage: 30V																		
	Min. Input amplitude: 2V																		
	Frequency range: 0.1Hz~100kHz																		
PNP/NPN	Distribution voltage: 12V																		
	Current: ≤ 20mA																		
	Frequency range: 0.1Hz~10kHz																		
NAMUR switch	Distribution voltage: approx.8.2V																		
	Short-circuit current: approx.8mA																		
	Frequency range: 0.1Hz~10kHz																		
Output signal:	<table border="0"> <tr> <td>Output1:</td> <td>4 ~ 20 mA</td> </tr> <tr> <td>Output2:</td> <td>relay contact</td> </tr> </table>	Output1:	4 ~ 20 mA	Output2:	relay contact														
Output1:	4 ~ 20 mA																		
Output2:	relay contact																		
Load capacity:	<table border="0"> <tr> <td>Output1:</td> <td>RL ≤ 500 Ω</td> </tr> <tr> <td>Output2:</td> <td>0.5A/35V DC</td> </tr> </table>	Output1:	RL ≤ 500 Ω	Output2:	0.5A/35V DC														
Output1:	RL ≤ 500 Ω																		
Output2:	0.5A/35V DC																		
Accuracy:	± 0.1%F.S.																		
Temperature drift:	≤ 0.01%F.S./°C																		
Response time:	≤ 500ms																		
Electromagnetic compatibility:	IEC 61326-3-1																		
Dielectric strength:	<table border="0"> <tr> <td>≥ 2500 V AC (intrinsically safe side / non-intrinsically safe side)</td> </tr> <tr> <td>≥ 500 V AC (Power supply side /non-intrinsically safe side)</td> </tr> </table>	≥ 2500 V AC (intrinsically safe side / non-intrinsically safe side)	≥ 500 V AC (Power supply side /non-intrinsically safe side)																
≥ 2500 V AC (intrinsically safe side / non-intrinsically safe side)																			
≥ 500 V AC (Power supply side /non-intrinsically safe side)																			
Insulation resistance:	≥ 100 MΩ (Input /Output/Power supply)																		
Operation temperature:	-20°C ~ +60°C																		
Storage temperature:	-40°C ~ +80°C																		
Dimension:	15.8 mm (W) × 121.6 mm (H) × 104.8 mm (D)																		
Fault states:	Input signal state indicator (red), it is remain bright when input over-range. it is flicker when input breakage.																		

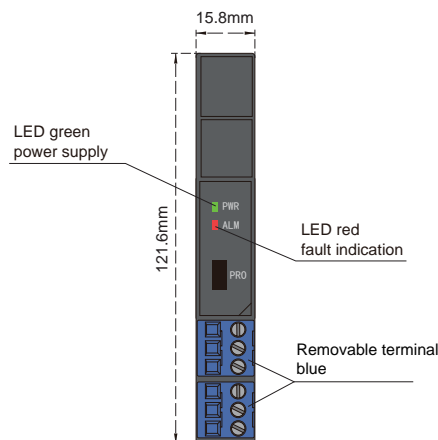

Wiring diagram

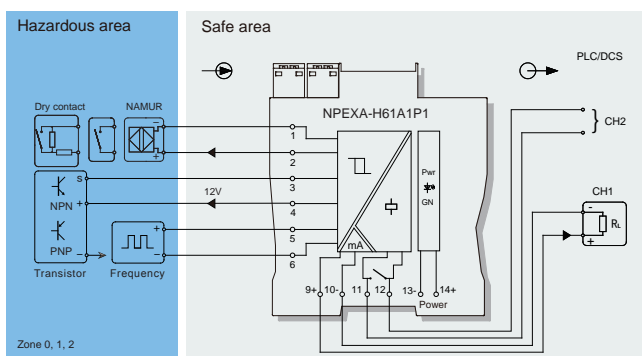

Explosive-proof parameters

National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation (NEPSI)
Explosive-proof grade: [Ex ia Ga] II C
Um: 250 V
Certified parameters (Terminals 1, 2):
Uo=10.5V, Io=13mA, Po=35mW, Co=1.68μF, Lo=100mH
Certified parameters (Terminals 5, 6):
Uo=10.5V, Io=6mA, Po=16mW, Co=1.68μF, Lo=700mH
Certified parameters (Terminals 3, 4, 6):
Uo=15.8V, Io=107mA, Po=423mW, Co=0.478μF, Lo=1.8mH

Model rules

NPEXA-H61A1P1
The output signal^[note1]

note1 : Output signal

Number	Output
1	4~20mA
2	1~5V
3	0~10mA
4	0~5V
5	0~10V
6	0~20mA