

## Features

- 3-wire system
- 24V signal system
- Strong resistance to surge
- 7.4mm Ultra-thin design
- Support terminal grounding (optional)
- 35 mm rail mounted

## Discription

This SPD limits induced transients of different origin (lightning stroke, switching impulse, etc.). This is achieved by diverting the transient current to ground and limiting the signal line voltage to a safe level for the duration of the surge.


It can be applied to 3-wire transmitter , RS-232 ect.

## Parameter

|                                                                 |                                           |
|-----------------------------------------------------------------|-------------------------------------------|
| Nominal voltage Un                                              | 24V                                       |
| Max. continuous operating voltage Uc(DC)                        | 32V                                       |
| Max. continuous operating voltage Uc(AC)                        | 22.5 V                                    |
| Nominal current I <sub>N</sub>                                  | 600 mA                                    |
| Total lightning impulse current I <sub>imp</sub> (10/350 μs),D1 | 7.5 kA                                    |
| Lightning impulse current I <sub>imp</sub> (10/350 μs),D1       | 2.5 kA                                    |
| Max. discharge current I <sub>max</sub> (8/20 μs),C2            | 20 kA                                     |
| Nominal discharge current I <sub>n</sub> (8/20 μs),C2           | 10 kA                                     |
| Voltage protection level Up(8/20 μs) , C2                       | L-L≤60 V/ L-PE≤60 V                       |
| Voltage protection level Up(1 kV/μs) , C3                       | L-L≤45 V/ L-PE≤45 V                       |
| Bandwidth fG(100 Ω resistance)                                  | 10 MHz                                    |
| Series impedance                                                | 1.8 Ω                                     |
| Response time T <sub>a</sub>                                    | <1 ns                                     |
| General parameters                                              |                                           |
| Operating temperature                                           | -40 °C ~ +80 °C                           |
| Installation                                                    | 35 mm DIN rail                            |
| Grounding mode                                                  | Rail/ terminal (optional)                 |
| Connecting wire size                                            | 0.2 mm <sup>2</sup> ~ 2.5 mm <sup>2</sup> |
| Material                                                        | PC                                        |
| Flame retardant grade(UL94)                                     | V0                                        |
| Protection degree                                               | IP20                                      |
| Standards                                                       | IEC 61643-21/ GB/T 18802.21               |




## Graphics

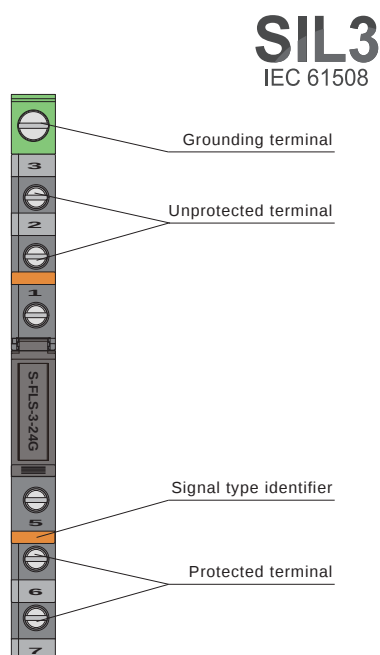


**SIL3**  
IEC 61508

## Schematic



## Dimensions

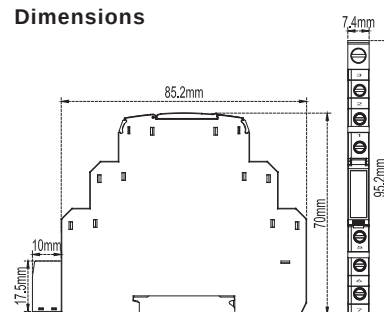

## Application

