

Features

- 3-wire system
- 5V signal system
- Max. impulse current 20 kA(8/20 µs)
- Plug in gold plating
- 12.4 mm, hot plugging
- 35 mm rail mounted

Description

This SPD limits induced transients of different origin (lightning stroke, switching impulse, etc.). This is achieved by diverting the transient current to ground and limiting the signal line voltage to a safe level for the duration of the surge.

It can be applied to 3 or 4 transmitter, RS-422 ect.


Parameter

Nominal voltage U_n	5 V
Max. continuous operating voltage $U_c(DC)$	6 V
Max. continuous operating voltage $U_c(AC)$	4 V
Nominal current I_n	850 mA
Total lightning impulse current limp(10/350 µs),D1	10 kA
Lightning impulse current limp(10/350 µs),D1	2.5 kA
Max. discharge current $I_{max}(8/20 \mu s), C2$	20 kA
Nominal discharge current $I_n(8/20 \mu s), C2$	10 kA
Voltage protection level $U_p(8/20 \mu s) , C2$	L-L≤45 V / L-PE≤550 V
Voltage protection level $U_p(1 kV/\mu s) , C3$	L-L≤15 V / L-PE≤550 V
Bandwidth $f_G(100 \Omega \text{ resistance})$	1 MHz
Series impedance	1 Ω
Response time T_a	<1 ns
General parameters	
Operating temperature	-40 °C ~ +80 °C
Installation	35 mm DIN rail
Grounding mode	Grounding rail
Connecting wire size	0.2 mm ² ~ 2.5 mm ²
Material	PC
Flame retardant grade(UL94)	V0
Protection degree	IP20
Standards	IEC 61643-21/ GB/T 18802.21




Graphics


SIL3
IEC 61508

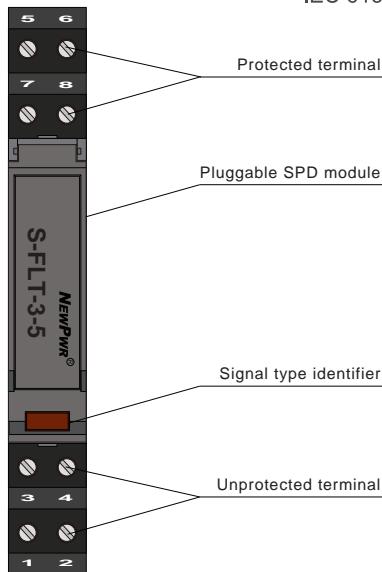

Schematic

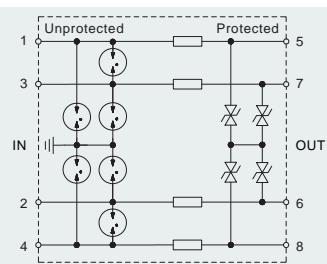

Dimensions

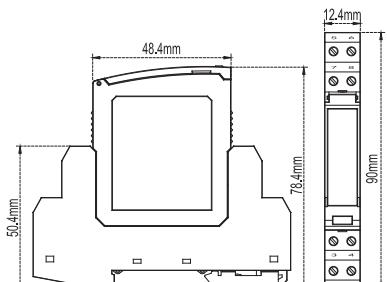

Application

